

►► Double stainless steel door TT1.2

Universally applicable as access to buildings and plants in the field of disposal and supply with average security requirements, as interior door for breweries and food industries for example

Stainless steel door, double door, ready for installation, double skinned, completely made from 4301/1.4307 stainless steel (AISI 304), with double rubber seal, the door and frame closing flush, the fixable and swing leave opening to the outside (in escape direction).

Door, skin: 1 mm, 55 mm thick, with injected CFCs-free polyurethane hard foam insulation, longitudinally ground surface finish, with rubber seal. Fastened to the frame with stable maintenance-free hinge plates. Mortise dead lock in the opening leaf provided for profile double cylinder (which is not included in the supply contract). Material of handle and cover: stainless steel.

The **fixable leaf** is operated by means of a sliding locking bolt. The contact surface between the opening leaf and fixable leaf is rubber sealed.

Z-frame, three-sided, fabricated from special section, with inserted rubber seal, with selectable sill closure, including fixing material.

Frame and door shielded arc-welded and acid bath cleaned before washing, drying and surface passivation.

Ordering options:

Frame:

- Z-frame
- Stock frame

Mounting:

- Embedded
- Bolted
 - with dowelling clips
 - through the frame not to affect the finished wall

Door opening options:




- Hinges on left
- Hinges on right

Sill closure:

- Without step flashing
- With step flashing

Special accessories available on request:

- Surface finish (lacquer, copper covering, wooden panelling)
- Anti-graffiti lacquer
- Door handle set, button outside, handle inside
- Panic lock
- Security ventilation louvres, openings to admit light
- Upper door closer
- One-part or two-part door arrestor
- 1.4571/1.4404 stainless steel
- Magnetic contact = door position indicator ('open' – 'closed')
- Lock-bolt contact or bolt position indicator ('open' – 'closed')
- Alarm system in door surface
- Block lock for alarm system
- Door heating (heating cable in frame and/or door surface)
- Steel sheet finish for exterior door surface for installations exposed to extreme sunlight
- Stock frame insulation

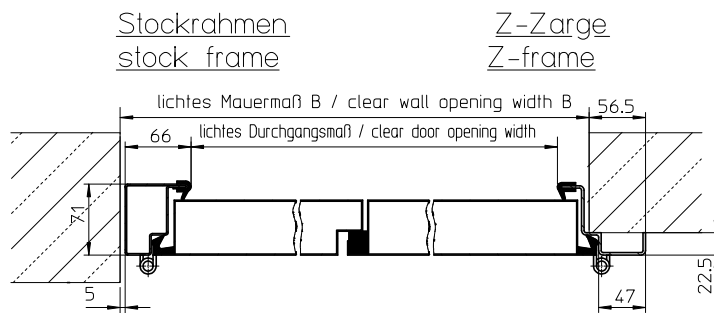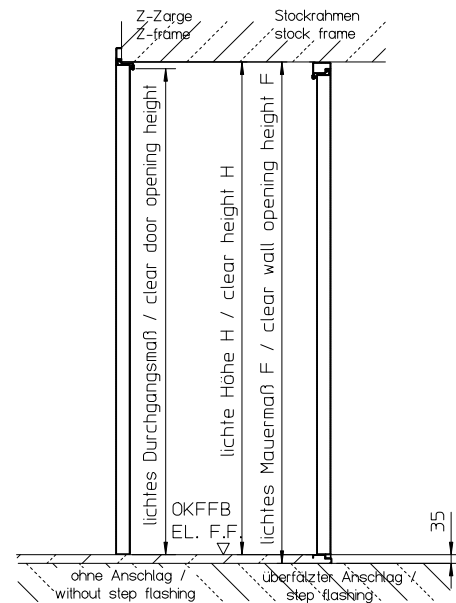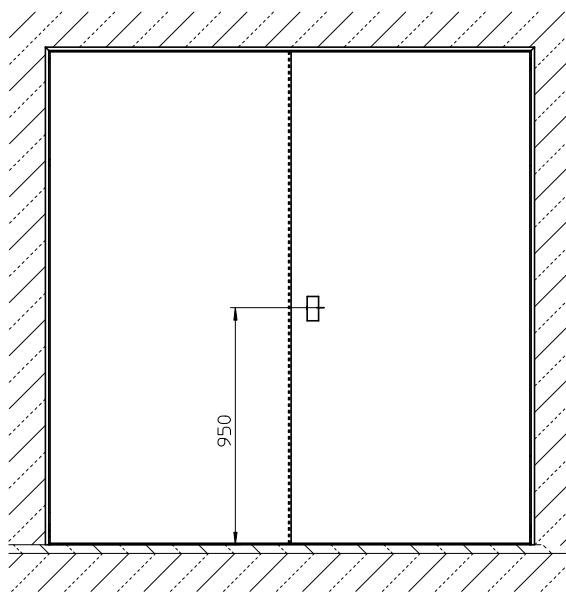

We manufacture to your specifications. Clear wall opening (F) = distance between bottom edge of lintel and top edge of unfinished floor
Clear height (H) = distance between bottom edge of lintel and top edge of finished floor

Installation place	clear width (B)	clear wall opening (F)	clear height (H)

HUBER SE

Industriepark Erasbach A1 · D-92334 Berching
Phone: + 49 - 84 62 - 201 - 0 · Fax: + 49 - 84 62 - 201 - 810
info@huber.de · Internet: www.huber.de

Subject to technical modification
Drawing No. 190.160, 8.2010

Double stainless steel door TT1.2